
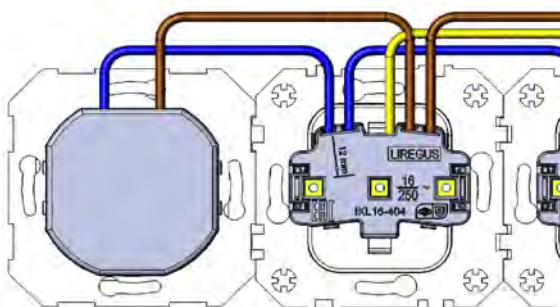



Product data sheet

LIREGUS

Smart USB charger (with 2 USB ports)



Reference number

IUK-2-01

Flush mount, smart USB charger for electronic devices with 2 ports type A, without frame

with 2 USB ports type A
screw fixing only, without claws

Intended use

- battery charging station for mobile devices with USB connection
- installation in flush box according to DIN 49073 (dept ~35mm)
- charging current: max. 3400 mA
- operation with suitable cover

Product characteristics

- Simultaneous charging of 2 devices possible
- Installation into multiple frame (1-6 place) with other devices possible

Polycarbonate plastic (scratch-proof, PC). Surface sprayed manually by Alpcryl Emaillack paint, (developed in Switzerland), and laked with matt lack. Paint has high UV resistance, is flame resistant according to DIN EN13501-1 and chemically resistant according to DIN 68861/1B; Compact mechanism for greater wiring space.

Centre plates colour, EAN code:

IUK-2-01.R/ON31 - mat brown, 4770025967515; package barcode 4770025967522;
IUK-2-01.R/ONC - mat cream, 4770025000366; package barcode 4770025000373
IUK-2-01.R/ON59 - mat black, 4770025001301; package barcode 4770025001318;

Technical specifications:

Input voltage, frequency	AC 100 ... 230 V +- 10% , 50/60 Hz
Stand-by power	approx. 0.1 W
Power loss	approx. 4 W
Ambient temperature	-5 ... +35 °C
Storage/transport temperature	-20 ... +70 °C
Connection	screw terminals, tightening torque max 0,5Nm
Output current	AC 120... 240V~ max. 3400 mA (2400mA + 1000mA)
Centre plates material	polycarbonate (PC)
Customs tariff number	8536699008