


Product data sheet

TV-FM-SAT socket outlet, ending (terminated)

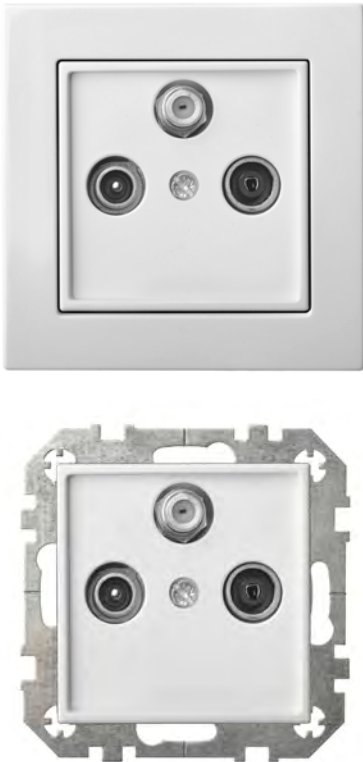

Reference number

IAL-3-01

TV-FM-SAT socket outlet, ending (terminated), without frame

- screw terminals
 - for cable TV, and DVB-T television (frequency range 47-860 MHz)
 - for radio signal (frequency range 87-108 MHz)
 - suitable for SAT IF and CATV domestic distribution installations (frequency range 950-2250MHz)
 - seamless CATV and SAT ranges and low distribution attenuation thanks to combined filter-tap structure
 - housing: torsion-resistant, passivated diecast zinc
 - metal supporting frame, for screw mounting
- Terminated outlets are used for individual and community installation (BK, CATV, MATV) connected to decoupling stub lines.

Polycarbonate plastic (scratch-proof, PC), glossy
Colour printing possible

Centre plates colour, EAN code:

- IAL-3-01.E/B - White, 4770025869710
- IAL-3-01.E/S - Sandy, 4770025870679
- IAL-3-01.E/R - Brown, 4770025874189
- IAL-3-01.E/Mt - Metallic, 4770025857366
- IAL-3-01.E/J - Black, 4770025851272
- IAL-3-01.E/Ch - Champagne, 4770025863251

Technical specifications

IN – TV (IEC male):	
Frequency range	47-860 MHz
Suitable for	DVB-C, DVB-T television
Attenuation	2.5 dB
DC through	no
IN – RF (IEC female):	
Frequency range	87-108 MHz
Suitable for	Radio signal
Attenuation	6.5 dB
DC through	no
IN – SAT (F female):	
Frequency range	950-2250MHz
Attenuation	2.2 dB
DC through	13/18 V, 22 kHz, max. +24 V/0.5 A
Protection	
IP	IP 20
Dept	35 mm