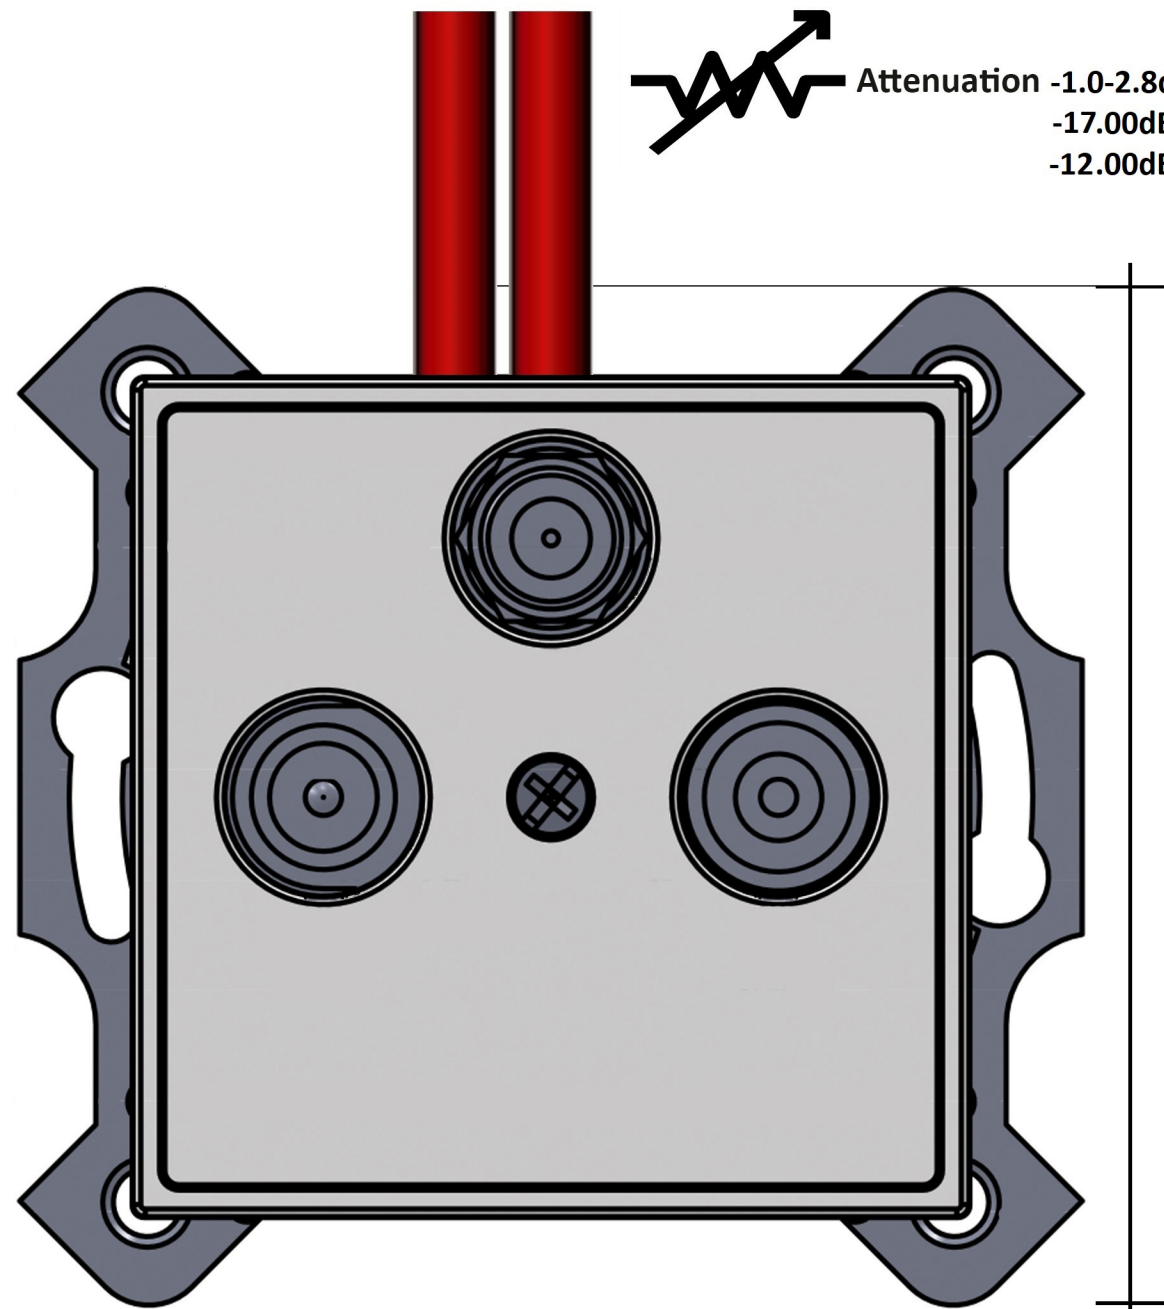
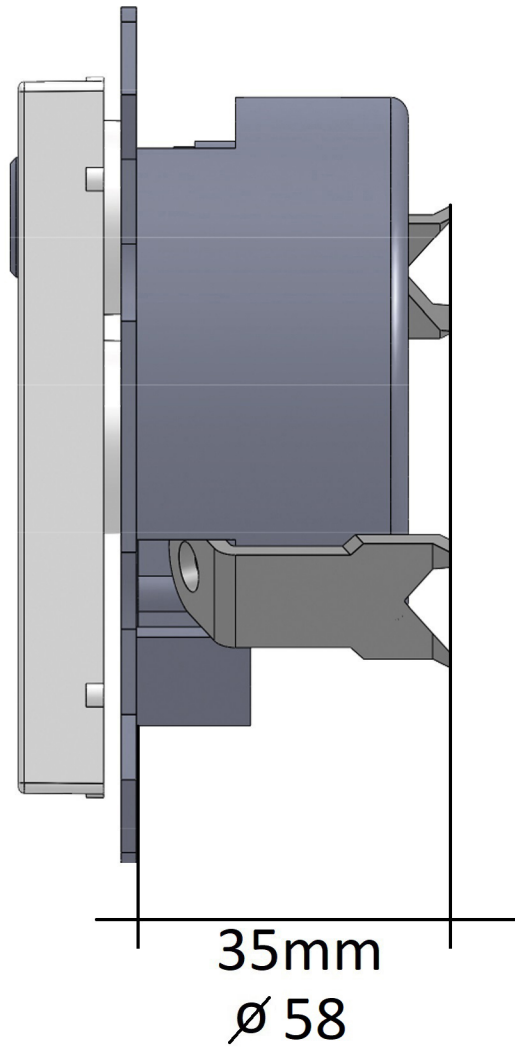

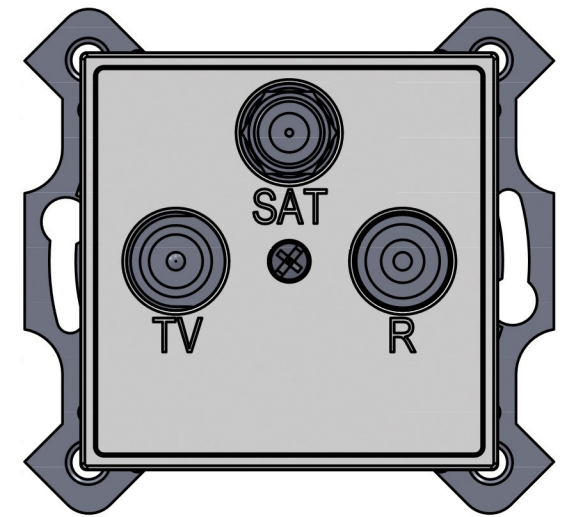


# LIREGŪS



 Attenuation -1.0-2.8dB (TV)  
-17.00dB (RF)  
-12.00dB (SAT)



  
IP20

30  
**Zn**  
Zinc

Housing: torsion-resistant, passivated diecast zinc



For cable TV, and DVB-T television:  
frequency range 47-860 MHz  
For radio signal:  
frequency range 87-108 MHz  
For SAT and CATV domestic distribution  
installations:  
frequency range 950-2250MHz



IN – SAT (F female): DC through  
13/18 V, 22 kHz (max. +24V/0.5 A)

**IAL-3-10-01**

MADE IN LITHUANIA SINCE 1944