
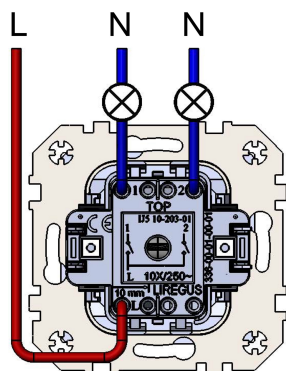


# Product data sheet

LIREGUS

## 2-gang push button switch, 1-pole, 1-way



### Reference number

IJ5.10-203-01

Flush mount 2-gang switch button, 1-pole, 1-way 10A/250V, without frame

1 pole  
screwless terminals for wires up to 2.5 mm<sup>2</sup>

### Intended use

- dept 27mm;
- installation in flush box according to DIN 49073;
- operation with suitable cover;
- fits to all Retro and Epsilon serie frames.

Polycarbonate plastic (scratch-proof, PC). Surface sprayed manually by Alpocryl Emailack paint, (developed in Switzerland), and lacked with matt lack. Paint has high UV resistance, is flame resistant according to DIN EN13501-1 and chemically resistant according to DIN 68861/1B.

### Centre plates colour, EAN code:

R/ON31 - mat brown: individual barcode 4770025967331; package barcode 4770025967348;  
R/ONC - mat cream: individual barcode 4770025000182; package barcode 4770025000199;  
R/ON59 - mat black: individual barcode 4770025001127; package barcode 4770025001134;

### Technical specifications:

Input voltage, frequency

AC 250 V +- 10% , 50/60 Hz

Standarts

EN 50581  
EN 60669-1  
Low-Voltage Directive 2014/35/EU  
RoHS Directive 2011/65/EU

Switching current

10A

Ambient temperature

-5 ... +35 °C

Storage/transport temperature

-20 ... +40 °C

Connection

spring terminals

Centre plates material

breakproof polycarbonate (PC)