

Product data sheet

Smart USB charger (with 2 USB ports)



Reference number

IUK-2-01

Flush mount, smart USB charger for electronic devices with 2 ports type A, without frame

with 2 USB ports type A
screw fixing only, without claws

Intended use



- battery charging station for mobile devices with USB connection
- installation in flush box according to DIN 49073 (dept ~35mm)
- charging current: max. 3400 mA
- operation with suitable cover

Product characteristics

- Simultaneous charging of 2 devices possible
- Installation into multiple frame (1-6 place) with other devices possible

Centre plates colour, EAN code:

IUK-2-01.E/B - White, 4770025962961, 10pc. package 4770025962978
IUK-2-01.E/S - Sandy, 4770025962985, 10pc. package 4770025962992
IUK-2-01.E/R - Brown, 4770025963067, 10pc. package 4770025963074
IUK-2-01.E/Mt - Metallic, 4770025963005, 10pc. package 4770025963012
IUK-2-01.E/J - Black, 4770025963029, 10pc. package 4770025963036
IUK-2-01.E/Ch - Champagne, 4770025963043, 10pc. package 4770025963050

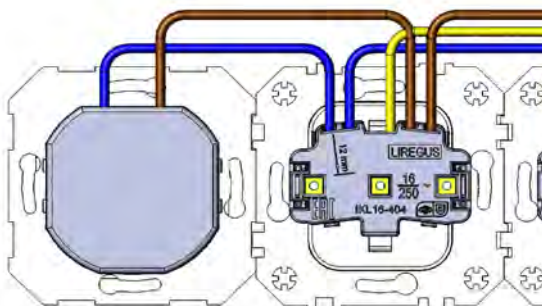

Technical specifications:

Input voltage, frequency	AC 100 ... 230 V +- 10% , 50/60 Hz
Stand-by power	approx. 0.1 W
Power loss	approx. 4 W
Ambient temperature	-5 ... +35 °C
Storage/transport temperature	-20 ... +70 °C
Connection	screw terminals, tightening torque max 0,5Nm
Output voltage	DC 5V (+- 5%)
Output current	AC 120... 240V~ max. 3400 mA (2400mA + 1000mA)
Centre plates material	polycarbonate (PC)